



Linkables Installation



Brite Ideas Decorating
 2011 No. 156th Street
 Omaha, NE 68116
 402.553.1178
 www.briteidea.com

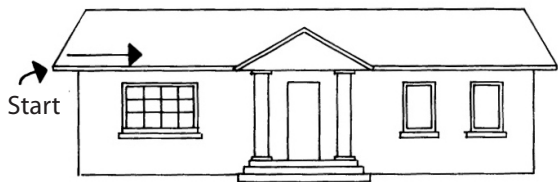

- 1 Install Linkables left to right. On peaks, always start at top. On linkables that are hinged, they can be installed on right or left. Pieces need to be even on both sides when finished.


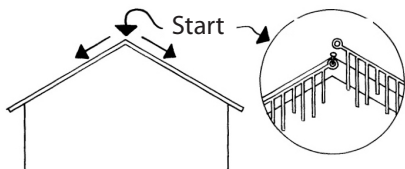


- 2 Use galvanized nail or screws, or permanent linkable (LHBR, LHSS, or LHW) hooks to attach to fascia board.

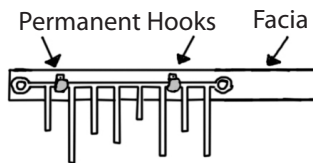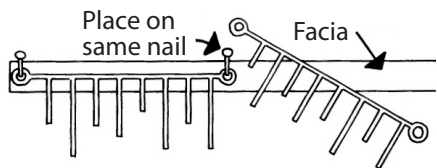


Click linkable frame to Permanent Hooks, attach with included screws.


Gable Clips (GC100) can be attached under asphalt or wood shingles on gables if you do not want to make holes in fascia board.

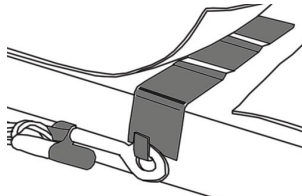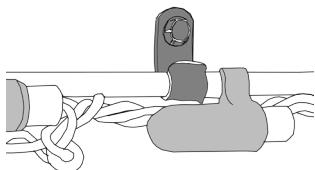


- 3 If gutters are available, attach linkables using Spiral Clips (SPCLIP) or with gutter guards use linkable gutter hooks (LHGG)

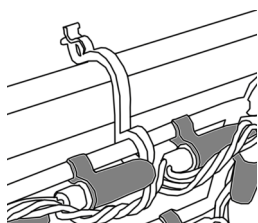

Attach larger loop of Spiral Clip to gutter, then smaller loop to linkable frame, use 2 clips per linkable.

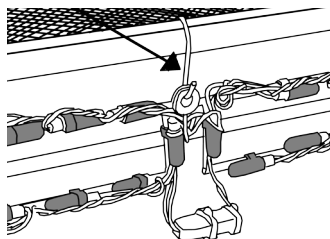

- ④ Use Jumper Cords to connect peaks to gutters to continue light string.

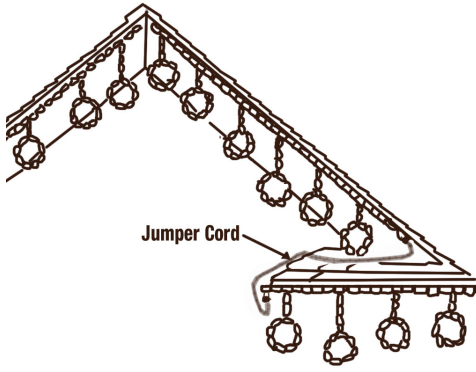

- ⑤ Connect female end into male to continue light string, connect 20-30 LED linkables on one outlet.
- ⑥ Adjust light clips to follow frames to give a finished look.